



G6 2U SuperMicro UHD Chassis

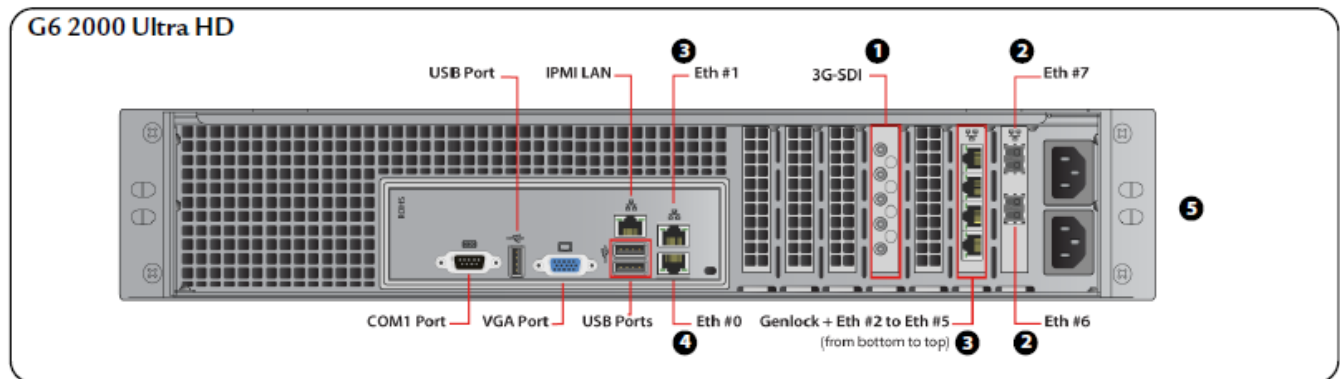

- ❶ Mini-DIN SDI connectors for input (may require mini-DIN SDI to BNC female patch cable included)
- ❷ 10 Gbe Ethernet connectors for input
- ❸ Ethernet connectors for output or management redundancy
- ❹ Network connector for management
- ❺ AC Power inputs (for redundancy purpose)

3G-SDI connectors



Note that the back panel components are SELV (Safety Extra Low Voltage) components.

Muse Live Ultra HD on G6 2072 - Version 5.x - Quick Start Guide

From:

<http://cameraangle.co.uk/> - WalkerWiki - wiki.alanwalker.uk

Permanent link:

http://cameraangle.co.uk/doku.php?id=wiki:g6_2u_supermicro_uhd_chassis&rev=1478603300

Last update: 2023/03/09 22:35

