

# Packager Live Configuration


Jun 2017

## Introduction

This section assumes that you or someone has completed the [Installation & OS Configuration](#) section.

## Packager Configuration


First we need to login, Navigate to your device <http://serveripaddress:8080> and you will see the following login page:

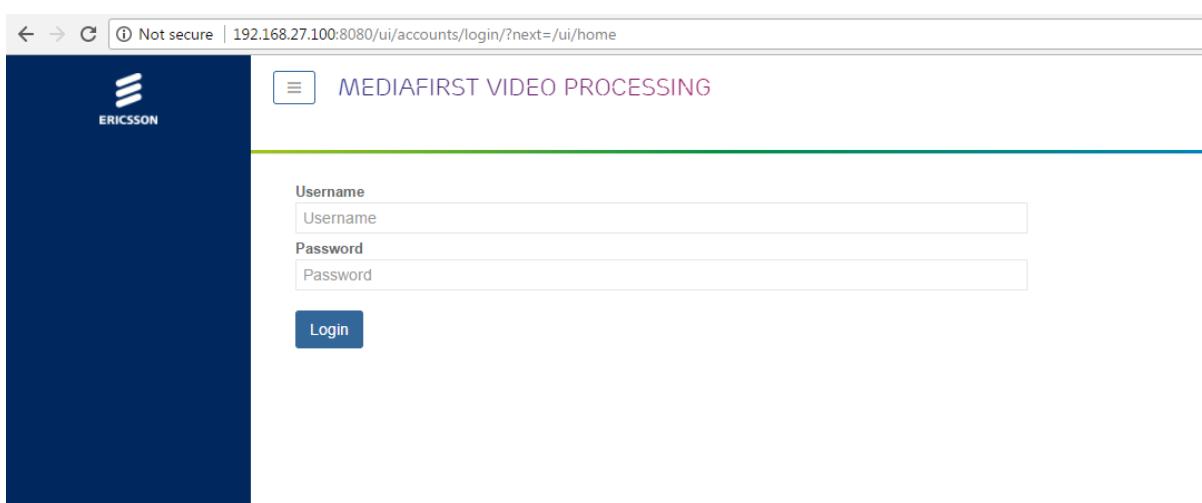

Login using the following:

```
Username: admin  
Password: admin
```

Once logged in you should see the following page:

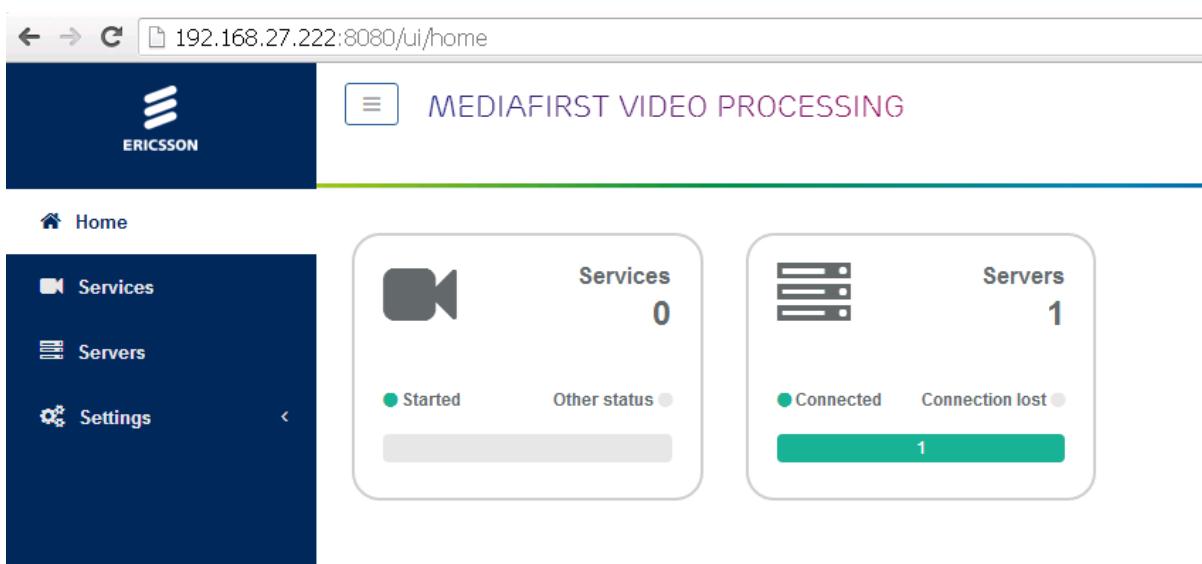

On a new server, the Services count will be zero. Servers will be 1 (if this is a stand alone system).

Click the Servers panel.

| Name | IP Address     | Processing Type                                      | Software  | Status    | Actions |
|------|----------------|--|---|-----------|---------|
| Pkg1 | 192.168.27.222 | Live Packaging , OD Packaging , Catalog , Controller | mfvp-controller 1.0.8.7 , mfvp-packaging 8.0.8.41 | connected |         |

You will see your server listed, what it supports (Live Packaging, OD Packaging etc.) and the software versions.

## Configure HTTP Headers of the origin server

HTTP Headers define the access rules to the origin server, and the CDN caching policy.

In the example below, we simply authorize any website to access any content on the origin server. This is not a valid production configuration; however this is fine for testing.

Minimum pattern is \* Access-Control-Allow-Origin:\*

On the left hand menu, click 'Settings'

Now select 'HTTP Headers'

Add a new entry using \* for Url Pattern and Access-Control-Allow-Origin:\* for the HTTP Headers.

| #            | Url Pattern | HTTP Headers                  |
|--------------|-------------|-------------------------------|
|              | *           | Access-Control-Allow-Origin:* |
| <b>+ Add</b> |             |                               |

Click 'Save and Exit'

## Catalog configuration

A catalog is an output definition, so we can create a catalog for HLS, for Dash, for Smooth Streaming and add the catalog's (outputs) to our packaging service configurations.

Click add service and select catalog

The screenshot shows the MediaFirst Video Processing web interface. On the left, there's a sidebar with icons for Home, Services (which is highlighted with a red box), Servers, and Settings. The main content area has a header "MEDIAFIRST VIDEO PROCESSING" and a breadcrumb "Home / Services". Below the breadcrumb, there are two buttons: "Add service" and "Import service...". A red box highlights the "Add service" button. A dropdown menu is open under "Add service", showing options like Catalog, Live Packaging, VOD Packaging, and Output. The "Catalog" option is also highlighted with a red box.

This will allow the creation of a new Catalog.

Enter a name for the new Catalog.

The screenshot shows the "Catalog" creation page. It has a header "Catalog". Below it, there's a form with a "Name\*" field containing "HLS", which is highlighted with a red box. Below the form, there are five columns: "Output Name", "Type", "Access URL", "Encryption", and "Content repl.". Under "Output Name", there's a button "+ Add new output" which is also highlighted with a red box.

Click Save and Continue (the Add New Output button will not work until you click Save and Continue).

The Catalog will need some outputs defined, you can add multiple outputs to a Catalog, so a single Catalog can have HLS, HSS and Dash outputs for example.

Click on the Add new output button.

This will open the page for new outputs.

The screenshot shows the 'Output' configuration page for an HLS output. The 'Name\*' field is set to 'HLS'. The 'Type\*' dropdown is set to 'HLS'. Under 'Publishing', the 'Access URL\*' field is 'HLS'. Under 'Manifests', there is one manifest named 'index'. A blue button '+ Add manifest' is visible. Under 'Scrambling', the 'Encryption\*' dropdown is 'None'. Under 'Content Replacement', the 'Replacement type\*' dropdown is '----'. Under 'Advanced parameters', 'GOP Per chunk\*' is '5', 'Multiplex mode\*' is 'Separate video and audio', and 'Metadata insertion' is checked with 'Enabled'. A PID of '189' is specified. At the bottom right are 'Cancel', 'Save and continue', and a blue 'Save and exit' button.

Enter the following:

Name: HLS  
 Type: HLS (from dropdown list)  
 Access URL: HLS (this will form part of the URL to retrieve the packaged segments)

Click Save and Exit.

Now add a second output for Dash using the same procedure, but using Dash instead of HLS for each section.

You have now configured a Catalog (an output basically) for Dash and HLS.

## Add Live Packaging

To add a live packaging service, from the services panel, select Add Service, then Live Packaging.

On this page we can configure our packaging parameters.

Try not to make any mistakes on this page, once you have saved it, you cannot edit it.

```

Name: Name of the service
GOP Duration: GOP Duration of incoming TS
GOP Signalling: How the GOP Boundaries are signalled. EBP for Ericsson sources.
IP Address: Multicast to tune to.
Port Range: ABR Port range.
Publishing Point: This is the file location, for local we are using the NAS drive we configured earlier, sub folders should be automatically created. file://nas/service1 for example.
DVR Duration: How far back we can rewind.
Catalog: Select your output Catalog here

```

Access URL: a name that will form part of the access URL.

At the bottom of this page you can see the full access URL(s).

- Access URLs**
- <http://<host>/dash/service1/manifest.mpd>
  - <http://<host>/HLS/service1/index.m3u8>

So these are constructed from the Interface IP <host>, the Catalog Output /HLS, the Access URL in the publishing service /service1 and the index name specified in the Catalog /index.m3u8.

Generally the server will have multiple network interfaces, and the packaged stream can be accessed from any of them.

## Start the Service

To start the service click the play button next to the associated service. The status will change to started.

|                 |                 | Add service | Import service... |         |         |         |
|-----------------|-----------------|-------------|-------------------|---------|---------|---------|
| Search in table |                 |             |                   |         |         | Actions |
| Name            | Processing Type | Stats       | Alarms            | Servers | Status  | Actions |
| Output1         | Catalog         |             |                   |         |         |         |
| Service1        | Live Packaging  |             |                   |         | started |         |

Rows per page: 20

Use SSH to check the `/opt/mfvp/mnt/nas` folder. You should see a folder has been created with the service name.

```
ls
service1
```

Now check the service folder, and you will see something similar to the following:

```
drwxr-xr-x. 2 envivio envivio 4096 Jun 19 08:59 1
drwxr-xr-x. 2 envivio envivio 4096 Jun 19 08:59 1497863311596
drwxr-xr-x. 2 envivio envivio 4096 Jun 19 08:59 2
drwxr-xr-x. 2 envivio envivio 4096 Jun 19 08:59 3
drwxr-xr-x. 2 envivio envivio 4096 Jun 19 08:59 4
lrwxrwxrwx. 1 envivio envivio 10 Jun 19 08:55 index -> index.tmp0
-rw-r--r--. 1 envivio envivio 48 Jun 19 08:55 index.tmp0
```

There are four folders here for the ABR recordings (these are not the output segments, just a mezzanine format recording). There are four folders because my port range was 10001-10004.

If you look inside one of the folders 1 to 4 you will see the recordings.

```
100.ts 112.ts 124.ts 136.ts 148.ts 15.ts 22.ts 34.ts 46.ts 58.ts 6.ts 81.ts 93.ts
101.ts 113.ts 125.ts 137.ts 149.ts 160.ts 23.ts 35.ts 47.ts 59.ts 70.ts 82.ts 94.ts
102.ts 114.ts 126.ts 138.ts 14.ts 161.ts 24.ts 36.ts 48.ts 5.ts 71.ts 83.ts 95.ts
103.ts 115.ts 127.ts 139.ts 150.ts 162.ts 25.ts 37.ts 49.ts 60.ts 72.ts 84.ts 96.ts
104.ts 116.ts 128.ts 13.ts 151.ts 163.ts 26.ts 38.ts 4.ts 61.ts 73.ts 85.ts 97.ts
105.ts 117.ts 129.ts 140.ts 152.ts 164.ts 27.ts 39.ts 50.ts 62.ts 74.ts 86.ts 98.ts
106.ts 118.ts 12.ts 141.ts 153.ts 16.ts 28.ts 3.ts 51.ts 63.ts 75.ts 87.ts 99.ts
107.ts 119.ts 130.ts 142.ts 154.ts 17.ts 29.ts 40.ts 52.ts 64.ts 76.ts 88.ts 9.ts
108.ts 11.ts 131.ts 143.ts 155.ts 18.ts 2.ts 41.ts 53.ts 65.ts 77.ts 89.ts
109.ts 120.ts 132.ts 144.ts 156.ts 19.ts 30.ts 42.ts 54.ts 66.ts 78.ts 8.ts
```

|        |        |        |        |        |       |       |       |       |       |       |       |
|--------|--------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|
| 10.ts  | 121.ts | 133.ts | 145.ts | 157.ts | 1.ts  | 31.ts | 43.ts | 55.ts | 67.ts | 79.ts | 90.ts |
| 110.ts | 122.ts | 134.ts | 146.ts | 158.ts | 20.ts | 32.ts | 44.ts | 56.ts | 68.ts | 7.ts  | 91.ts |
| 111.ts | 123.ts | 135.ts | 147.ts | 159.ts | 21.ts | 33.ts | 45.ts | 57.ts | 69.ts | 80.ts | 92.ts |

## Prerequisites on Encoder configuration for Live streams

One or more input stream(s)  
Single video stream (H.264) per port  
Audio stream (AAC-LC)  
ALD or EBP GOP Signaling  
All video bitrates share the same PID  
All audio of a given language share the same PID  
All audio bit rates the same.  
All Hours in UTC Time  
Encoder and packager are using the same NTP server.

From:

<http://cameraangle.co.uk/> - WalkerWiki - [wiki.alanwalker.uk](http://wiki.alanwalker.uk)



Permanent link:

[http://cameraangle.co.uk/doku.php?id=packager\\_live\\_configuration](http://cameraangle.co.uk/doku.php?id=packager_live_configuration)

Last update: **2023/03/09 22:35**