

# Packager Live Configuration


Jun 2017

## Introduction

This section assumes that you or someone has completed the [Installation & OS Configuration](#) section.

## Packager Configuration

First we need to login, Navigate to your device <http://serveripaddress:8080> and you will see the following login page:

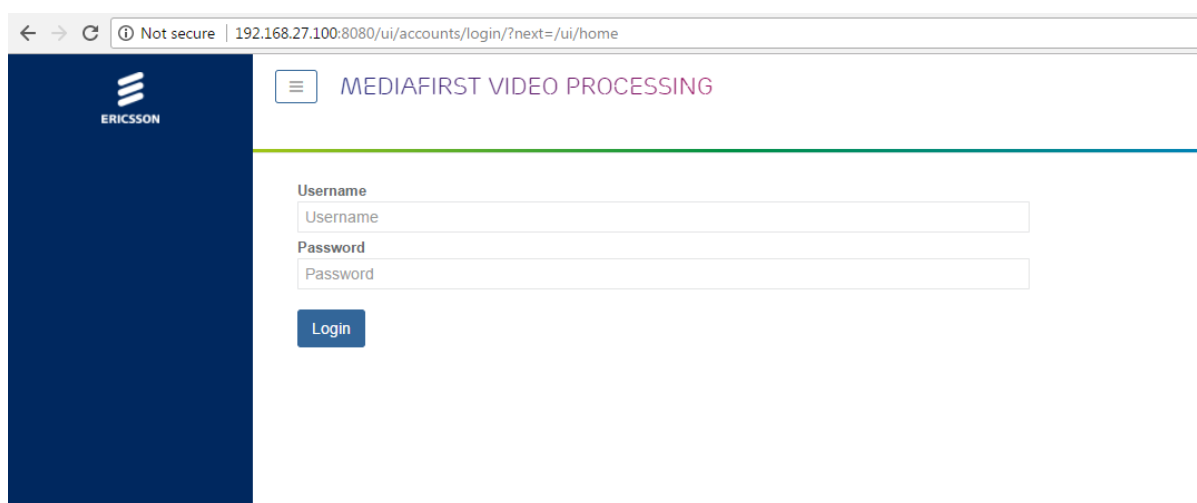

← → ↻ ⓘ Not secure | 192.168.27.100:8080/ui/accounts/login/?next=/ui/home

**ERICSSON**

☰ MEDIAFIRST VIDEO PROCESSING

Username  
Username


Password  
Password

Login

Login using the following:


Username: admin  
Password: admin

Once logged in you should see the following page:

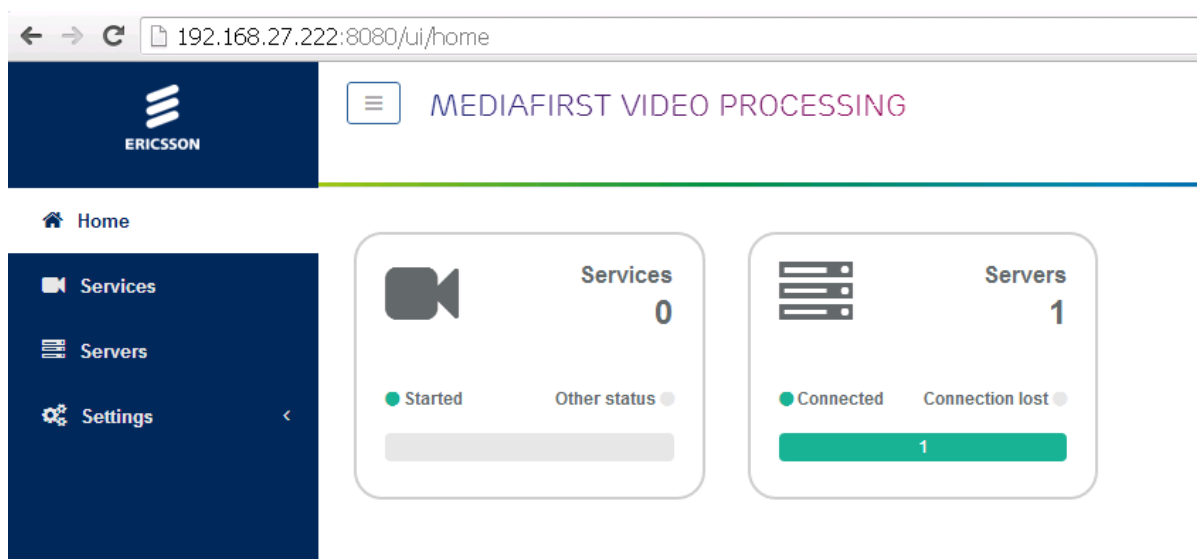

On a new server, the Services count will be zero. Servers will be 1 (if this is a stand alone system).

Click the Servers panel.

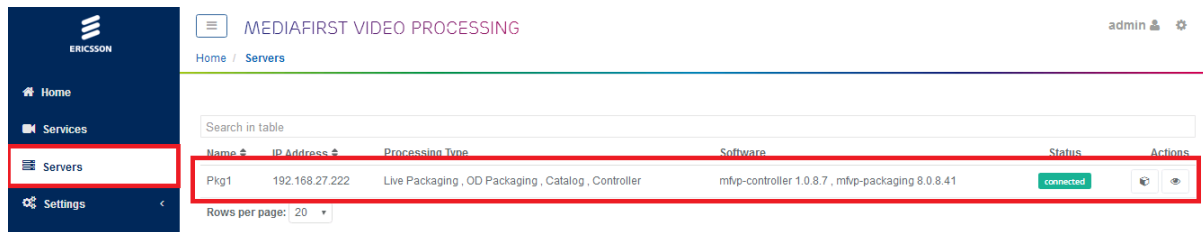

Name	IP Address	Processing Type	Software	Status	Actions
Pkg1	192.168.27.222	Live Packaging, OD Packaging, Catalog, Controller	mfvp-controller 1.0.8.7, mfvp-packaging 8.0.8.41	connected	

Rows per page: 20

You will see your server listed, what it supports (Live Packaging, OD Packaging etc.) and the software versions.


## Configure HTTP Headers of the origin server

HTTP Headers define the access rules to the origin server, and the CDN caching policy.

In the example below, we simply authorize any website to access any content on the origin server. This is not a valid production configuration; however this is fine for testing.

Minimum pattern is \* Access-Control-Allow-Origin:\*

On the left hand menu, click 'Settings'

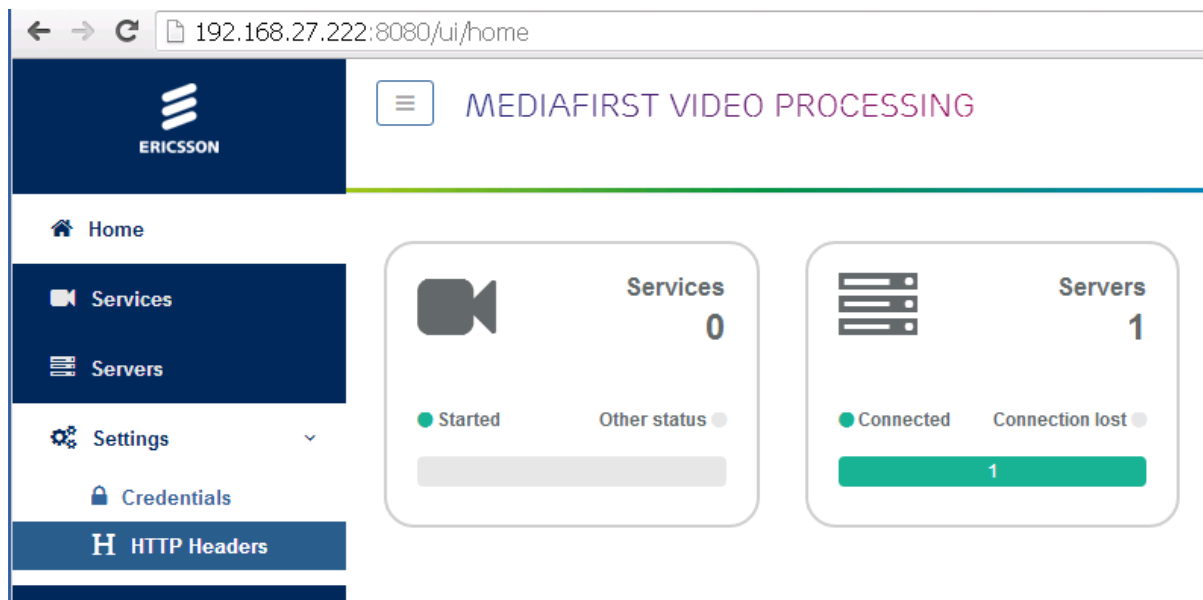

192.168.27.222:8080/ui/home

ERICSSON MEDIAFIRST VIDEO PROCESSING

Home Services Servers Settings Credentials HTTP Headers

Services 0

Started Other status

Servers 1

Connected Connection lost

1

# Url Pattern HTTP Headers

\* Access-Control-Allow-Origin:\*

+ Add

Now select 'HTTP Headers'

Add a new entry using \* for Url Pattern and Access-Control-Allow-Origin:\* for the HTTP Headers.

# Url Pattern HTTP Headers

\* Access-Control-Allow-Origin:\*


+ Add

Click 'Save and Exit'

## Catalog configuration

A catalog is an output definition, so we can create a catalog for HLS, for Dash, for Smooth Streaming and add the catalog's (outputs) to our packaging service configurations.

Click add service and select catalog

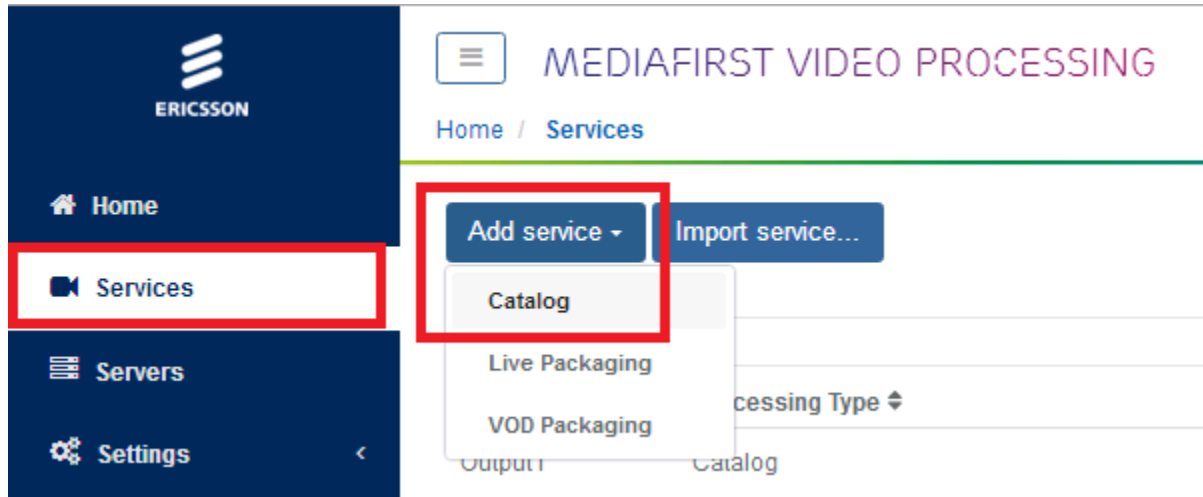

This will allow the creation of a new Catalog.

Enter a name for the new Catalog.

From:  
<http://cameraangle.co.uk/> - WalkerWiki - [wiki.alanwalker.uk](http://wiki.alanwalker.uk)

Permanent link:  
[http://cameraangle.co.uk/doku.php?id=pakager\\_live\\_configuration&rev=1497895796](http://cameraangle.co.uk/doku.php?id=pakager_live_configuration&rev=1497895796)

Last update: **2023/03/09 22:35**

