

Raspberry Pi 3 / Zero

These pages contain information about the Raspberry Pi 3 and Zero (and other models as they come along). Information about accessories will be posted in a different section.

40 Way GPIO Header



**Raspberry Pi B
Rev 2 P1 GPIO Header**

	Pin No.		
3.3V	1	2	5V
GPIO2	3	4	5V
GPIO3	5	6	GND
GPIO4	7	8	GPIO14
GND	9	10	GPIO15
GPIO17	11	12	GPIO18
GPIO27	13	14	GND
GPIO22	15	16	GPIO23
3.3V	17	18	GPIO24
GPIO10	19	20	GND
GPIO9	21	22	GPIO25
GPIO11	23	24	GPIO8
GND	25	26	GPIO7

Key


Power +	UART
GND	SPI
I ² C	GPIO

**Raspberry Pi B+
B+ J8 GPIO Header**


	Pin No.		
3.3V	1	2	5V
GPIO2	3	4	5V
GPIO3	5	6	GND
GPIO4	7	8	GPIO14
GND	9	10	GPIO15
GPIO17	11	12	GPIO18
GPIO27	13	14	GND
GPIO22	15	16	GPIO23
3.3V	17	18	GPIO24
GPIO10	19	20	GND
GPIO9	21	22	GPIO25
GPIO11	23	24	GPIO8
GND	25	26	GPIO7
DNC	27	28	DNC
GPIO5	29	30	GND
GPIO6	31	32	GPIO12
GPIO13	33	34	GND
GPIO19	35	36	GPIO16
GPIO26	37	38	GPIO20
GND	39	40	GPIO21

This header is common to the Raspberry Pi 3 and Zero (The R-Pi one only had a 24 pin header)


Raspberry Pi 3

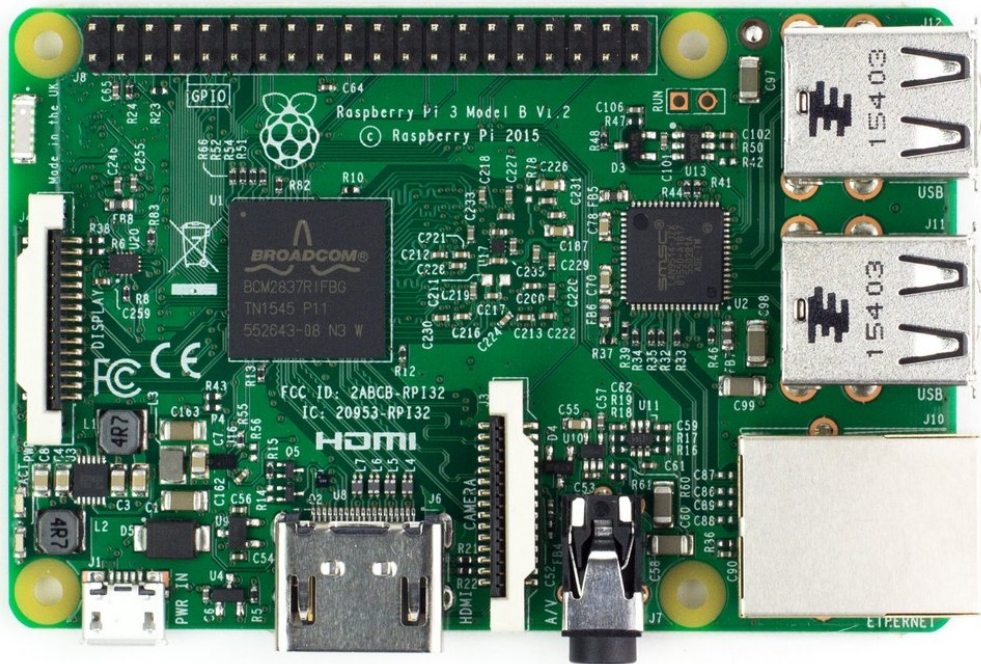


Raspberry Pi Zero 1.3

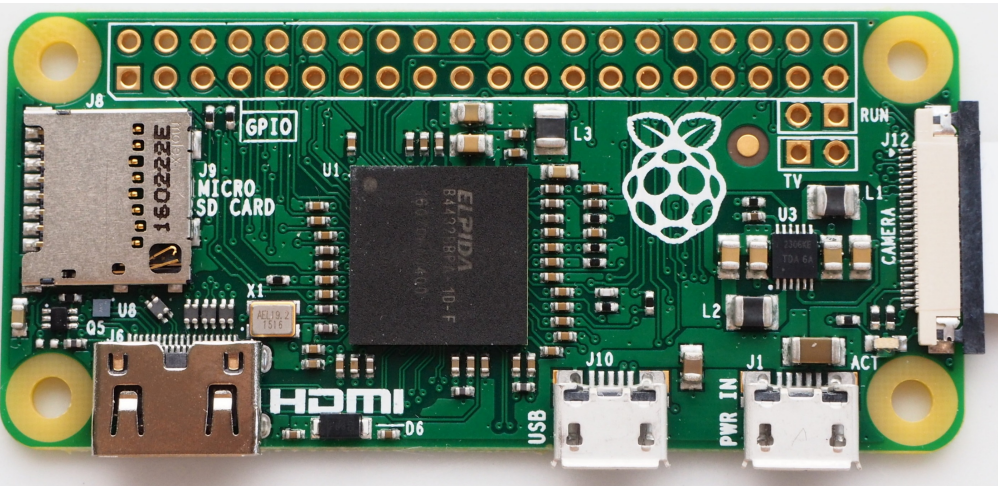

Raspberry Pi Zero Dimensions

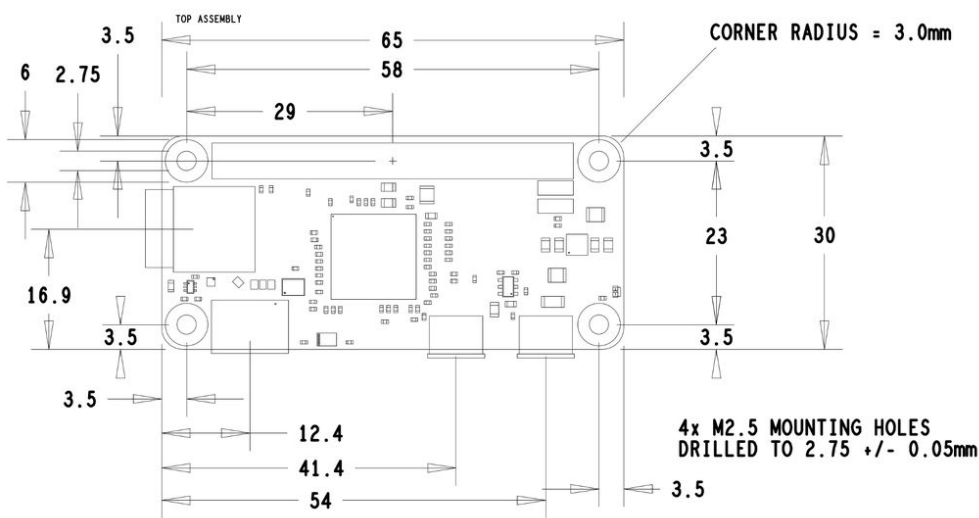

Raspberry Pi 2/3 Dimensions

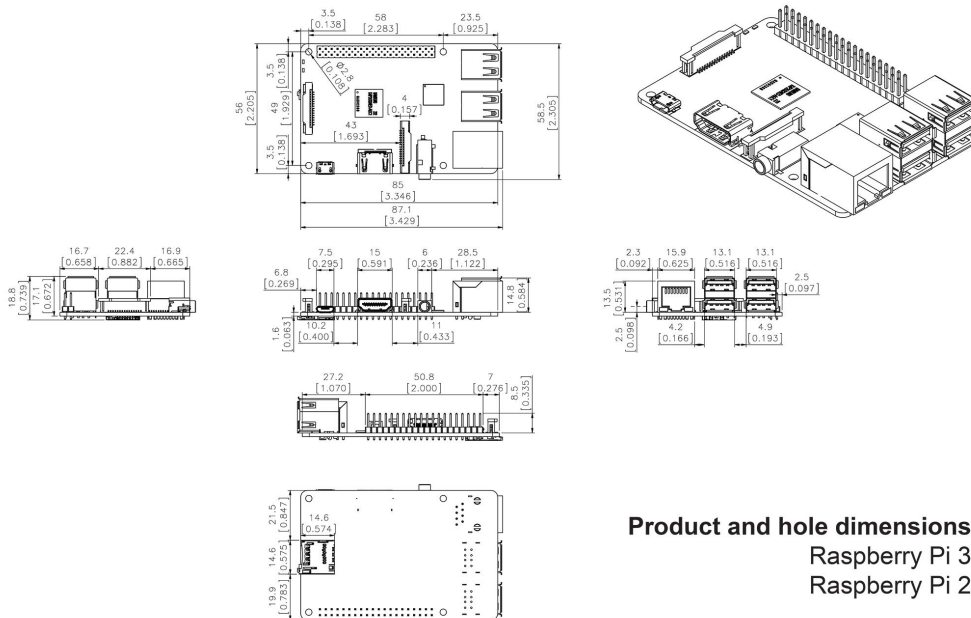

Product and hole dimensions
Raspberry Pi 3
Raspberry Pi 2

From:

<http://cameraangle.co.uk/> - WalkerWiki - wiki.alanwalker.uk

Permanent link:

<http://cameraangle.co.uk/doku.php?id=wiki:rpihardware&rev=1488793088>

Last update: 2023/03/09 22:35

